


Tolerances		Revisions	
1-20=+/-0,2	20-30=+/-0,3	30-40=+/-0,4	40-50=+/-0,5
50-100=+/-0,75	100-300=+/-1,5	Angles=+/-1	
Dimensions are in Millimeters		NOTES (plating thickness in micro-inches):	
		1. Per QQ-B-626	2. Per QQ-S-764
		3. Per QQ-C-530	4. Per QQ-B-750
		5. Per MIL-P-19468	6. Per ZZ-R-765
		7. Per WW-T-799	8. Gold pl. 5 min. over nickel pl. 50 min. over copper strike
		9. Nickel pl. 100 min. over copper strike	10. Per QQ-P-35
		11. Gold pl. 30 min. over nickel pl. 50 min. over copper strike	
		Approved M.H.	Checked M.H.
		Approved S.A.	Checked S.A.
		Date	Date



1. Connector : IPX	Description	
2. Cable: 50ohm Micro Coax 1.13mm	Cable Assembly, IPX right angle crimp jack to IPX right angle crimp jack.	
3. Connector : IPX	with 50ohm micro 1.13mm coax cable, 24 inches in length.	
4.	Scale	
5.	2:1	
6.	Drawing No.	
7.	CB1.13-2IPX-24"	
8.	File Name	
	CB1.13-2IPX-24"	

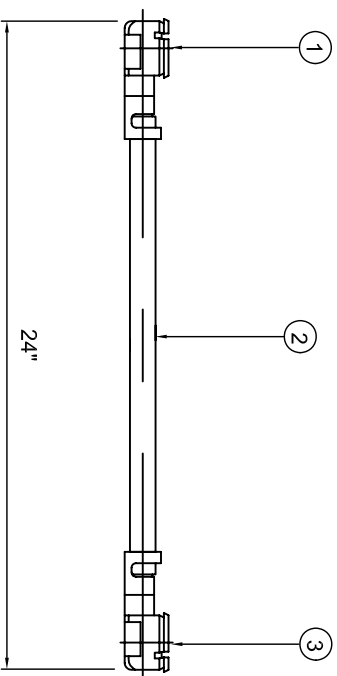

**Lighthouse Technologies, Inc.**

9511 Ridgehaven Ct, Suite B  
San Diego, CA 92123

Part Number:  
CB1.13-2IPX-24"