


Revisions		Approved	Date
Description/Approver/Date	Checked	M.H.	Date
	Drawn	S.A.	Date


Tolerances
1-20=+/-0.2
20-30=+/-0.3
30-40=+/-0.4
40-50=+/-0.5
50-100=+/-0.75
100-300=+/-1.5
Angles=+/-1

Dimensions are in Millimeters

NOTES (plating thickness:	5. Per MIL-P-19468	9. Nickel pl. 100 min. over
In micro-inches:	6. Per ZZ-R-765	copper strike
1. Per QQ-B-626	7. Per WW-T-799	10. Per QQ-P-35
2. Per QQ-S-764	8. Gold pl. 5 min. over	11. Gold pl. 30 min. over
3. Per QQ-C-530	nickel pl. 50 min. over	nickel pl. 50 min. over
4. Per QQ-B-750	copper strike	copper strike

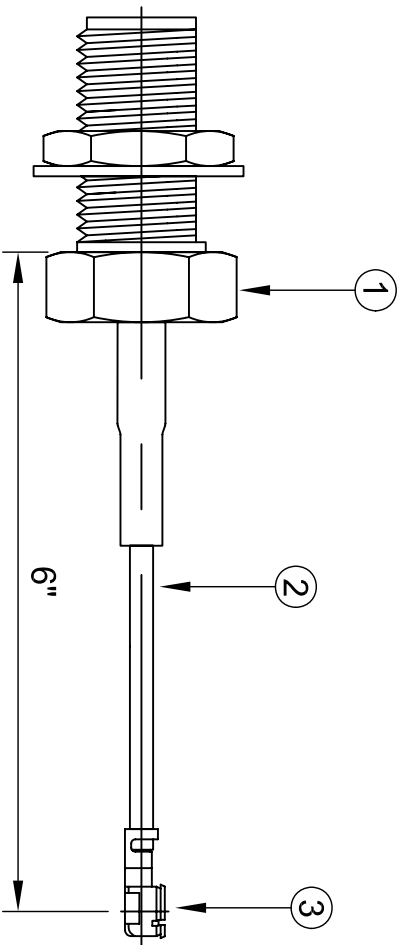

1. Connector : LTI-SASF13GT-178	Description	
2. Cable: Micro Coax 50ohm 1.13 mm	Cable Assembly, SMA bulkhead crimp jack to IPX crimp jack,	
3. Connector : IPX	with 1.13mm micro coax 50ohm cable, 6 inches in length.	
4.	Scale	2:1
5.	Drawing No.	CB1.13-IPX-SAF3GT-6in
6.	File Name	CB1.13-IPX-SAF3GT-6in
7.		
8.		

	
Lighthouse Technologies, Inc. 9511 Ridgeway Ct, Suite B. San Diego, CA 92123	
Part Number:	CB1.13-IPX-SAF3GT-6in