


| Tolerances | | Revisions | |
|-------------------------------|----------------|---|---|
| 1-20=+/-0.2 | 20-30=+/-0.3 | 1-20=+/-0.2 | 20-30=+/-0.3 |
| 30-40=+/-0.4 | 40-50=+/-0.5 | 40-50=+/-0.5 | 50-100=+/-0.75 |
| 50-100=+/-0.75 | 100-300=+/-1.5 | Angles=+/-1 | |
| Dimensions are in Millimeters | | NOTES (plating thickness in micro-inches): | |
| | | 1. Per QQ-B-626 | 2. Per QQ-S-764 |
| | | 3. Per QQ-C-530 | 4. Per QQ-B-750 |
| | | 5. Per MIL-P-19468 | 6. Per ZZ-R-765 |
| | | 7. Per WW-T-799 | 8. Gold pl. 5 min. over nickel pl. 50 min. over copper strike |
| | | 9. Nickel pl. 100 min. over copper strike | 10. Per QQ-P-35 |
| | | 11. Gold pl. 30 min. over nickel pl. 50 min. over copper strike | |
| | | Approved M.H. | Date |
| | | Checked M.H. | Date |
| | | Drawn S.A. | Date |
| | | Description/Approver/Date | |

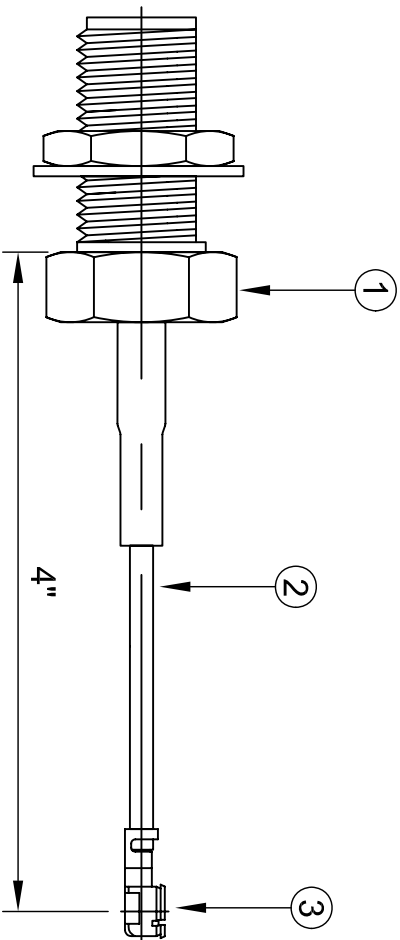

| | | |
|---|---|------------------------|
| 1. Connector : LTI-SASF13GT-178 | Description | |
| 2. Cable: Micro Coax 50ohm 1.32mm double shielded | Cable Assembly, SMA bulkhead crimp jack to IPX crimp jack, | |
| 3. Connector : IPX | with 1.32mm double shielded micro coax 50ohm cable, 4 inches in length. | |
| 4. | Scale | 2:1 |
| 5. | Drawing No. | CB1.32D-IPX-SAF3GT-4in |
| 6. | File Name | CB1.32D-IPX-SAF3GT-4in |
| 7. | LTI 9511 Ridgeway Ct, Suite B, San Diego, CA 92123 | |
| 8. | Part Number: CB1.32D-IPX-SAF3GT-4in | |
| Lighthouse Technologies, Inc. | | |