



Revisions		Approved	Date
Description/Approver/Date	Checked	M.H.	Date
	Drawn	S.A.	Date
<b>Tolerances</b> 1-20=+/-0.2 20-30=+/-0.3 30-40=+/-0.4 40-50=+/-0.5 50-100=+/-0.75 100-300=+/-1.5 Angles=+/-1			
<b>Dimensions are in Millimeters</b>			
<b>NOTES (plating thickness)</b> In micro-inches: 1. Per QQ-B-626 2. Per QQ-S-764 3. Per QQ-C-530 4. Per QQ-B-750 5. Per MIL-P-19468 6. Per ZZ-R-765 7. Per WW-T-799 8. Gold pl. 5 min. over nickel pl. 50 min. over copper strike 9. Nickel pl. 100 min. over copper strike 10. Per QQ-P-35 11. Gold pl. 30 min. over nickel pl. 50 min. over copper strike			

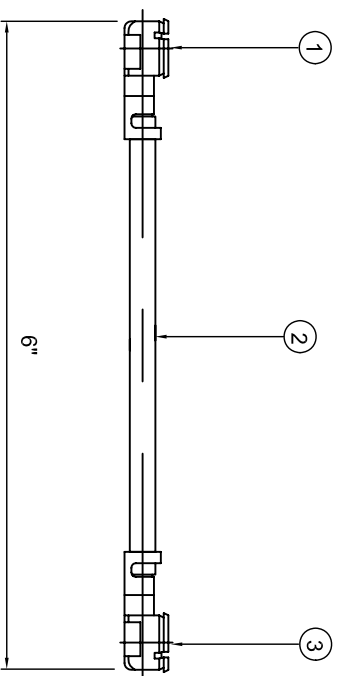

1.	Connector : IPX		
2.	Cable : 500hm Micro Coax 1.32mm double shielded		
3.	Connector : IPX		
4.			
5.			
6.			
7.			
8.			

		<b>Lighthouse Technologies, Inc.</b> 9511 Ridgehaven Ct, Suite B San Diego, CA 92123	
Part Number: <b>CB1.32D-2IPX-6"</b>			
Description Cable Assembly, IPX right angle crimp jack to IPX right angle crimp jack			
with 500hm micro 1.32mm double shielded coax cable, 6 inches in length.			
Scale	2:1	Drawing No.	File Name
			CB1.32D-2IPX-6"