


Tolerances		Revisions									
1-20=+/-0,2	20-30=+/-0,3	30-40=+/-0,4	40-50=+/-0,5								
50-100=+/-0,75	100-300=+/-1,5	Angles=+/-1									
Dimensions are in Millimeters		<table border="1"> <thead> <tr> <th>Description/Approver/Date</th> <th>Approved M.H.</th> <th>Checked M.H.</th> <th>Date</th> </tr> </thead> <tbody> <tr> <td></td> <td></td> <td>Drawn S.A.</td> <td>Date</td> </tr> </tbody> </table>		Description/Approver/Date	Approved M.H.	Checked M.H.	Date			Drawn S.A.	Date
Description/Approver/Date	Approved M.H.	Checked M.H.	Date								
		Drawn S.A.	Date								
NOTES (plating thickness in micro-inches): 5. Per MILL.-P-19468 6. Per ZZ-R-765 7. Per WW-T-799 8. Gold pl. 5 min. over 9. Nickel pl. 100 min. over 10. Per QQ-P-35 11. Gold pl. 30 min. over 12. Per QQ-S-764 13. Per QQ-C-530 14. Per QQ-B-750 15. Per QQ-B-626 16. Per WW-T-799 17. Gold pl. 5 min. over 18. Nickel pl. 50 min. over 19. copper strike 20. copper strike											



1. Connector : LTI-SASF13GT-178	Description	
2. Cable: Micro Coax 50ohm 1.32mm double shielded	Cable Assembly, SMA bulkhead crimp jack to IPX crimp jack,	
3. Connector : IPX	with 1.32mm double shielded micro coax 50ohm cable, 8 inches in length.	
4.	Scale	
5.	2:1	
6.	Drawing No.	
7.	CB1.32D-IPX-SAF3GT-8in	
8.	File Name	
	CB1.32D-IPX-SAF3GT-8in	

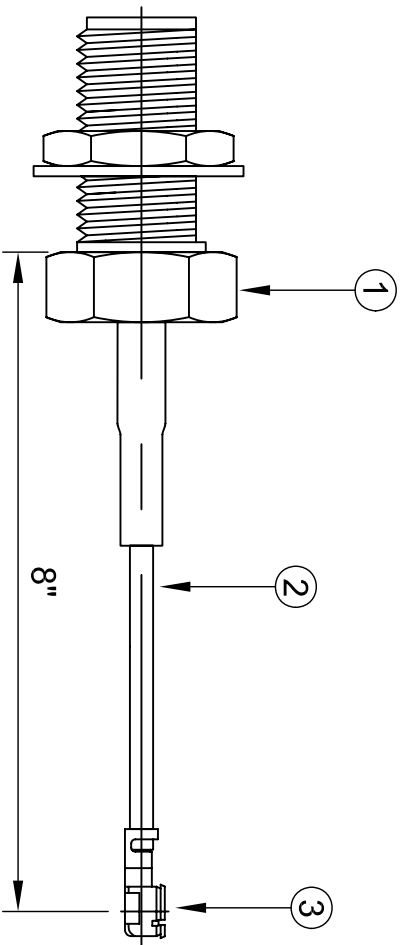

Lighthouse Technologies, Inc.
 9511 Ridgeway Ct, Suite B.
 San Diego, CA 92123
 Part Number:
 CB1.32D-IPX-SAF3GT-8in