


Revisions		Approved	Date
Description/Approver/Date	Checked	M.H.	Date
Drawn	S.A.	Date	
Tolerances	1-20=+/-0.2		
	20-30=+/-0.3		
	30-40=+/-0.4		
	40-50=+/-0.5		
	50-100=+/-0.75		
	100-300=+/-1.5		
	Angles=+/-1		
Dimensions are in Millimeters			
NOTES (plating thickness:			
1. Per QQ-B-626	5. Per MIL-P-19468	6. Per ZZ-R-765	9. Nickel pl. 100 min. over copper strike
2. Per QQ-S-764	7. Per WW-T-799	8. Gold pl. 5 min. over nickel pl. 50 min. over copper strike	10. Per QQ-P-35
3. Per QQ-C-530			11. Gold pl. 30 min. over nickel pl. 50 min. over copper strike
4. Per QQ-B-750			



1. Connector : LTI-SASRF13GT-178	Description	
2. Cable: Micro Coax 50ohm 1.32mm double shielded micro coax	Cable Assembly, RP-SMA bulkhead crimp jack to IPX crimp jack,	
3. Connector : IPX	with 1.32mm double shielded 50ohm cable, 4 inches in length.	
4.	Scale	
5.	2:1	
6.	Drawing No.	
7.	File Name	
8.	CB1.32D-IPX-SARF3GT-4in	

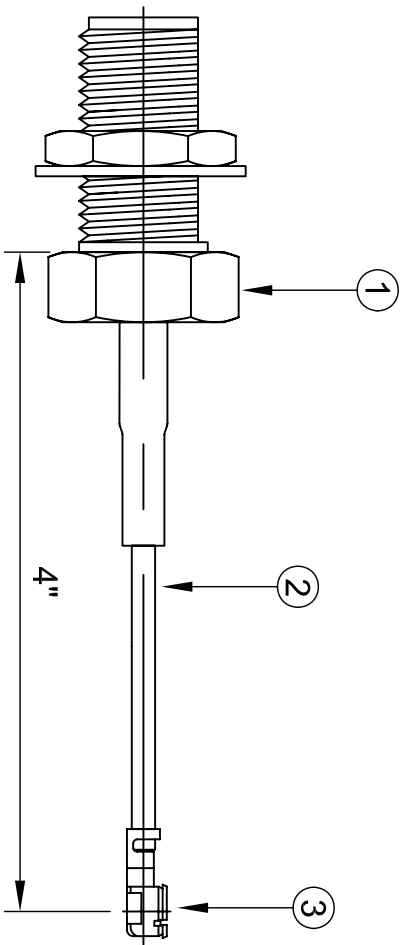

Lighthouse Technologies, Inc.

9511 Ridgeway Ct, Suite B.
San Diego, CA 92123

Part Number:
CB1.32D-IPX-SARF3GT-4in