


Tolerances		Revisions	
1-20=+/-0,2	20-30=+/-0,3	30-40=+/-0,4	40-50=+/-0,5
50-100=+/-0,75	100-300=+/-1,5	Angles=+/-1	
Dimensions are in Millimeters			
1. Per QO-B-626 2. Per QO-S-764 3. Per QO-C-530 4. Per QO-B-750		5. Per MILL-P-19468 6. Per ZZ-R-765 7. Per WW-T-799 8. Gold pl. 5 min. over nickel pl. 50 min. over copper strike 9. Nickel pl. 100 min. over copper strike 10. Per QO-P-35 11. Gold pl. 30 min. over nickel pl. 50 min. over copper strike	
Description/Approver/Date M.H. M.H.		Approved M.H. M.H.	
Date Date		Date Date	



1. Connector : IPX	Description	
2. Cable: 50ohm RG-178	Cable Assembly, IPX right angle crimp jack to IPX right angle crimp jack	
3. Connector : IPX	with 50ohm RG-178, 6 inches in length.	
4.	Scale	2:1
5.	Drawing No.	
6.	File Name	CBG-2IPX-6"
7.		
8.		

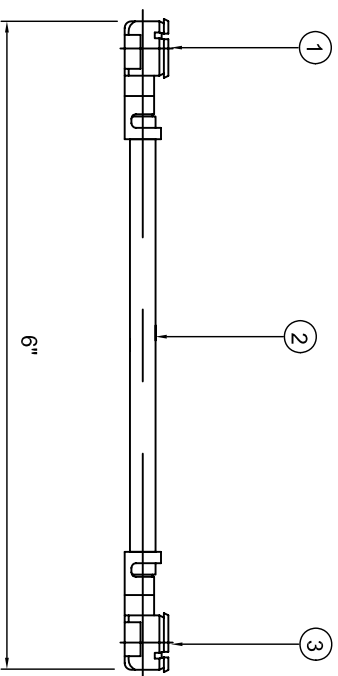

Lighthouse Technologies, Inc.
 9511 Ridgeway Ct, Suite B
 San Diego, CA 92123
 Part Number:
 CBG-2IPX-6"