



Tolerances		Revisions	
1-20=+/-0,2	20-30=+/-0,3	1-20=+/-0,2	20-30=+/-0,3
30-40=+/-0,4	40-50=+/-0,5	40-50=+/-0,5	50-100=+/-0,75
50-100=+/-0,75	100-300=+/-1,5	100-300=+/-1,5	Angles=+/-1
Angles=+/-1		Dimensions are in Millimeters	
Description/Approver/Date	Checked	Approved	Date
	M.H.	M.H.	Date
	Drawn	S.A.	Date
NOTES (plating thickness): 1. Per QQ-B-626 2. Per QQ-S-764 3. Per QQ-C-530 4. Per QQ-B-750 5. Per MIL-P-19468 6. Per ZZ-R-765 7. Per WW-T-799 8. Gold pl. 5 min. over nickel pl. 50 min. over copper strike 9. Nickel pl. 100 min. over copper strike 10. Per QQ-P-35 11. Gold pl. 30 min. over nickel pl. 50 min. over copper strike			

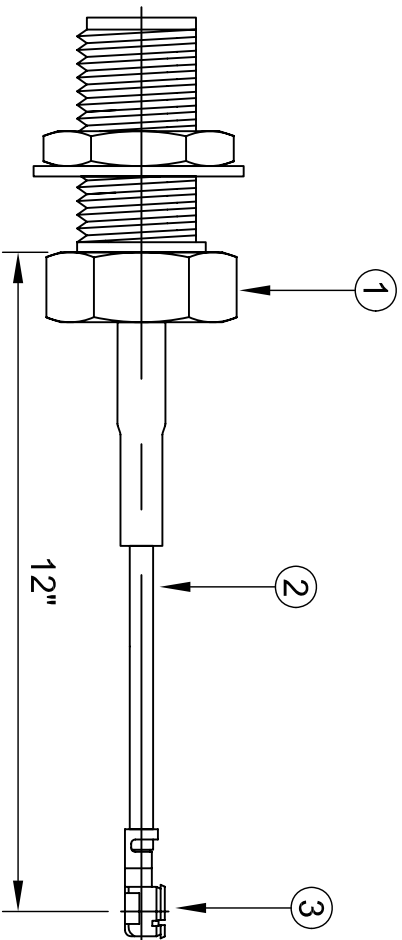

1. Connector : LTI-SASF13GT-178	Description	
2. Cable: Micro Coax 50ohm RG-178	Cable Assembly, SMA bulkhead crimp jack to IPX crimp jack,	
3. Connector : IPX	with RG-178 50ohm cable, 12 inches in length.	
4.	Scale	2:1
5.	Drawing No.	CBG-IPX-SAF3GT-12in
6.	File Name	CBG-IPX-SAF3GT-12in
7.	 Lighthouse Technologies, Inc. 9511 Ridgeway Ct, Suite B. San Diego, CA 92123 Part Number: CBG-IPX-SAF3GT-12in	
8.		