


Tolerances		Revisions	
1-20=+/-0,2	20-30=+/-0,3	1-20=+/-0,2	20-30=+/-0,3
30-40=+/-0,4	40-50=+/-0,5	40-50=+/-0,5	50-100=+/-0,75
50-100=+/-0,75	100-300=+/-1,5	Angles=+/-1	
<b>Dimensions are in Millimeters</b>			
Description/Approver/Date	Checked	Approved	Date
	M.H.	M.H.	Date
	Drawn	S.A.	Date
<b>NOTES (plating thickness)</b>			
1. Per QQ-B-626	6. Per MILL-P-19468	9. Nickel pl. 100 min. over copper strike	
2. Per QQ-S-764	7. Per ZZ-R-765	10. Per QQ-P-35	
3. Per QQ-C-530	8. Gold pl. 5 min. over nickel pl. 50 min. over copper strike	11. Gold pl. 30 min. over nickel pl. 50 min. over copper strike	
4. Per QQ-B-750			



1. Connector : LTI-SASRF13GT-178	Description	
2. Cable: 50 ohm RG 178	Cable Assembly, RP-SMA bulkhead crimp jack to IPX crimp jack,	
3. Connector : IPX	with RG-178 50ohm cable, 24 inches in length.	
4.	Scale	2:1
5.	Drawing No.	CBG-IPX-SARF3GT-24in
6.	File Name	CBG-IPX-SARF3GT-24in
7.	Part Number:	
8.	CBG-IPX-SARF3GT-24in	

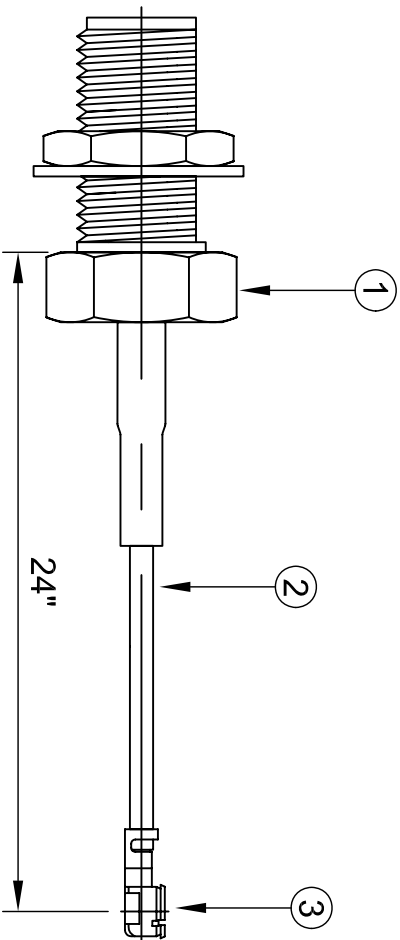

**Lighthouse Technologies, Inc.**

9511 Ridgeway Ct, Suite B,  
San Diego, CA 92123

Part Number:  
CBG-IPX-SARF3GT-24in