



Revisions		Approved	Date
Description/Approver/Date	Checked	M.H.	Date
Drawn	S.A.	Date	
<b>Tolerances</b> 1-20=+/-0.2 20-30=+/-0.3 30-40=+/-0.4 40-50=+/-0.5 50-100=+/-0.75 100-300=+/-1.5 Angles=+/-1			
<b>Dimensions are in Millimeters</b>			
<b>NOTES</b> (plating thickness: In micro-inches: 1. Per QQ-B-626 2. Per QQ-S-764 3. Per QQ-C-530 4. Per QQ-B-750 5. Per MIL-P-19468 6. Per ZZ-R-765 7. Per WW-T-799 8. Gold pl. 5 min. over nickel pl. 50 min. over copper strike 9. Nickel pl. 100 min. over copper strike 10. Per QQ-P-35 11. Gold pl. 30 min. over nickel pl. 50 min. over copper strike			

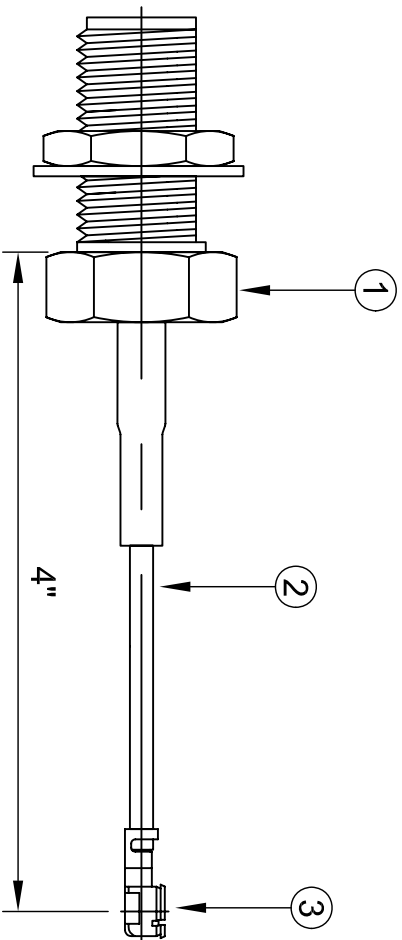

1. Connector : LTI-SASF13GT-178	Description	
2. Cable: Micro Coax 50ohm 1.13 mm	Cable Assembly, SMA bulkhead crimp jack to IPX crimp jack,	
3. Connector : IPX	with 1.13mm micro coax 50ohm cable, 4 inches in length.	
4.	Scale	2:1
5.	Drawing No.	CB1.13-IPX-SAF3GT-4in
6.	File Name	CB1.13-IPX-SAF3GT-4in
7.	 <b>Lighthouse Technologies, Inc.</b> 9511 Ridgeway Ct, Suite B. San Diego, CA 92123 Part Number: CB1.13-IPX-SAF3GT-4in	
8.		