



Tolerances		Revisions	
1-20=+/-0,2	20-30=+/-0,3	1-20=+/-0,2	20-30=+/-0,3
30-40=+/-0,4	40-50=+/-0,5	40-50=+/-0,5	50-100=+/-0,75
50-100=+/-0,75	100-300=+/-1,5	Angles=+/-1	
Dimensions are in Millimeters			
Description/Approved/Date		Approved	Date
Checked		M.H.	Date
Drawn		S.A.	Date
NOTES (plating thickness) 5. Per MILL-P-19468 In micro-inches: 6. Per ZZ-R-765 1. Per QQ-B-626 7. Per WW-T-799 2. Per QQ-S-764 8. Gold pl. 5 min. over 3. Per QQ-C-530 nickel pl. 50 min. over 4. Per QQ-B-750 copper strike 9. Nickel pl. 100 min. over copper strike 10. Per QQ-P-35 11. Gold pl. 30 min. over nickel pl. 50 min. over copper strike			

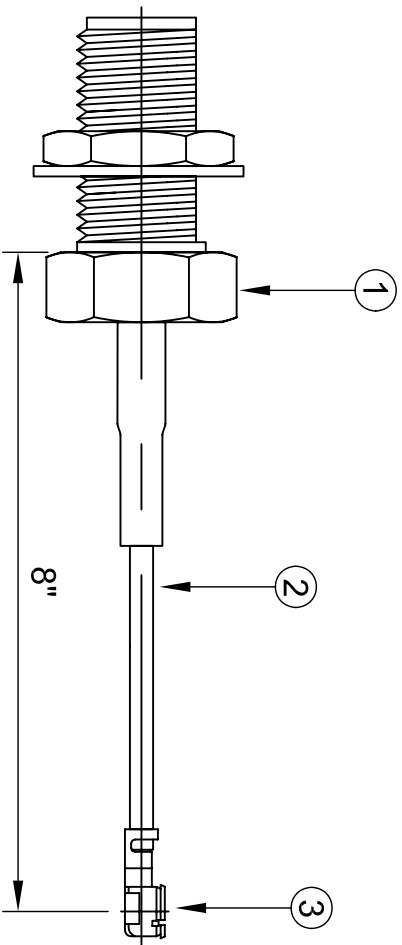

1. Connector : LTI-SASRF13GT-178	Description	
2. Cable: Micro Coax 50ohm 1.13mm micro coax	Cable Assembly, RP-SMA bulkhead crimp jack to IPX crimp jack,	
3. Connector : IPX	with 1.13mm double shielded 50ohm cable, 8 inches in length.	
4.	Scale	2:1
5.	Drawing No.	CB1.13-IPX-SARF3GT-8in
6.	File Name	CB1.13-IPX-SARF3GT-8in
7.	 Lighthouse Technologies, Inc. 9511 Ridgehaven Ct, Suite B. San Diego, CA 92123 Part Number: CB1.13-IPX-SARF3GT-8in	
8.		