



Revisions		Approved	Date
Description/Approver/Date	Checked	M.H.	Date
	Drawn	S.A.	Date
Tolerances 1-20=+/-0,2 20-30=+/-0,3 30-40=+/-0,4 40-50=+/-0,5 50-100=+/-0,75 100-300=+/-1,5 Angles=+/-1			
Dimensions are in Millimeters			
NOTES (plating thickness)			
1. Per QQ-B-626	6. Per ZZ-R-765	9. Nickel pl. 100 min. over copper strike	
2. Per QQ-S-764	7. Per WW-T-799	10. Per QQ-P-35	
3. Per QQ-C-530	8. Gold pl. 5 min. over nickel pl. 50 min. over copper strike	11. Gold pl. 30 min. over nickel pl. 50 min. over copper strike	
4. Per QQ-B-750			

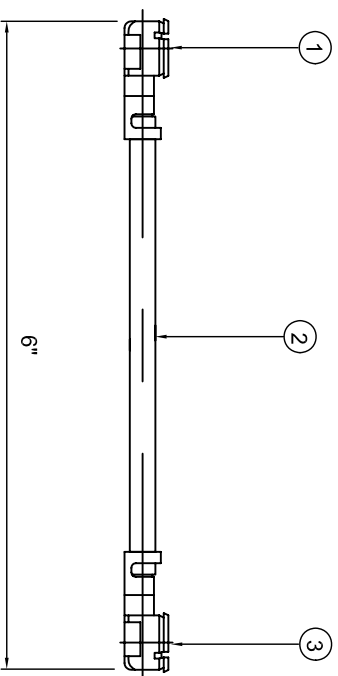

1. Connector : IPX	Description	
2. Cable: 50ohm Micro Coax 1.32mm double shielded	Cable Assembly, IPX right angle crimp jack to IPX right angle crimp jack	
3. Connector : IPX	with 50ohm micro 1.32mm double shielded coax cable, 6 inches in length.	
4.	Scale	2:1
5.	Drawing No.	CB1.32D-2IPX-6"
6.	File Name	CB1.32D-2IPX-6"
7.	 Lighthouse Technologies, Inc. 9511 Ridgehaven Ct, Suite B San Diego, CA 92123 Part Number: CB1.32D-2IPX-6"	
8.		