



Tolerances		Revisions									
1-20=+/-0.2	20-30=+/-0.3	30-40=+/-0.4	40-50=+/-0.5								
50-100=+/-0.75	100-300=+/-1.5	Angles=+/-1									
Dimensions are in Millimeters		<table border="1"> <thead> <tr> <th>Description/Approver/Date</th> <th>Approved M.H.</th> <th>Checked M.H.</th> <th>Date</th> </tr> </thead> <tbody> <tr> <td></td> <td></td> <td>Drawn S.A.</td> <td>Date</td> </tr> </tbody> </table>		Description/Approver/Date	Approved M.H.	Checked M.H.	Date			Drawn S.A.	Date
Description/Approver/Date	Approved M.H.	Checked M.H.	Date								
		Drawn S.A.	Date								
NOTES (plating thickness): 1. Per QQ-B-626 2. Per QQ-S-764 3. Per QQ-C-530 4. Per QQ-B-750 5. Per MIL-P-19468 6. Per ZZ-R-765 7. Per WW-T-799 8. Gold pl. 5 min. over nickel pl. 50 min. over copper strike 9. Nickel pl. 100 min. over copper strike 10. Per QQ-P-35 11. Gold pl. 30 min. over nickel pl. 50 min. over copper strike											

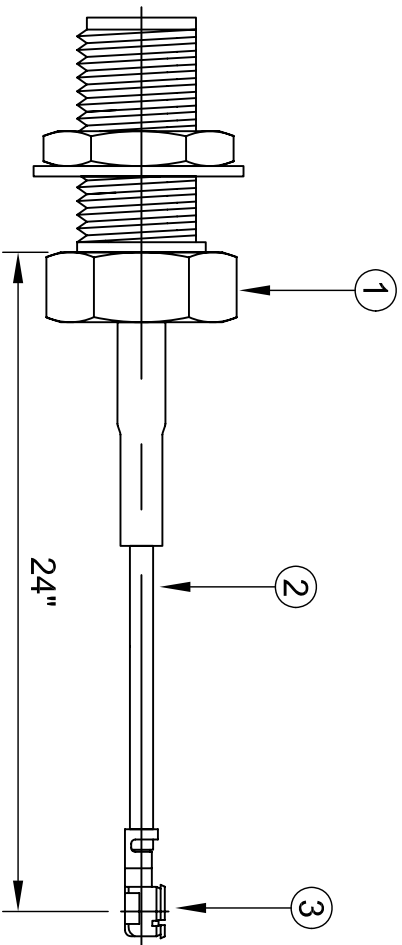

1.	Connector : LTI-SASF13GT-178
2.	Cable: Micro Coax 50ohm 1.32mm double shielded
3.	Connector : IPX
4.	
5.	
6.	
7.	
8.	

	
Lighthouse Technologies, Inc. 9511 Ridgeway Ct, Suite B. San Diego, CA 92123	
Part Number:	CB1.32D-IPX-SAF3GT-24in
Description	
Cable Assembly, SMA bulkhead crimp jack to IPX crimp jack,	
with 1.32mm double shielded micro coax 50ohm cable, 24 inches in length.	
Scale	2:1
Drawing No.	CB1.32D-IPX-SAF3GT-24in
File Name	CB1.32D-IPX-SAF3GT-24in