


Tolerances		Revisions	
1-20=+/-0.2	20-30=+/-0.3	1-20=+/-0.2	20-30=+/-0.3
30-40=+/-0.4	40-50=+/-0.5	40-50=+/-0.5	50-100=+/-0.75
50-100=+/-0.75	100-300=+/-1.5	100-300=+/-1.5	Angles=+/-1
Angles=+/-1		Dimensions are in Millimeters	

Description/Approver/Date	Approved	Date
	M.H.	Date
	M.H.	Date
	Drawn	Date
	S.A.	Date

NOTES (plating thickness):

1. Per QQ-B-626	6. Per ZZ-R-765	9. Nickel pl. 100 min. over copper strike
2. Per QQ-S-764	7. Per WW-T-799	10. Per QQ-P-35
3. Per QQ-C-530	8. Gold pl. 5 min. over nickel pl. 50 min. over copper strike	11. Gold pl. 30 min. over nickel pl. 50 min. over copper strike
4. Per QQ-B-750		

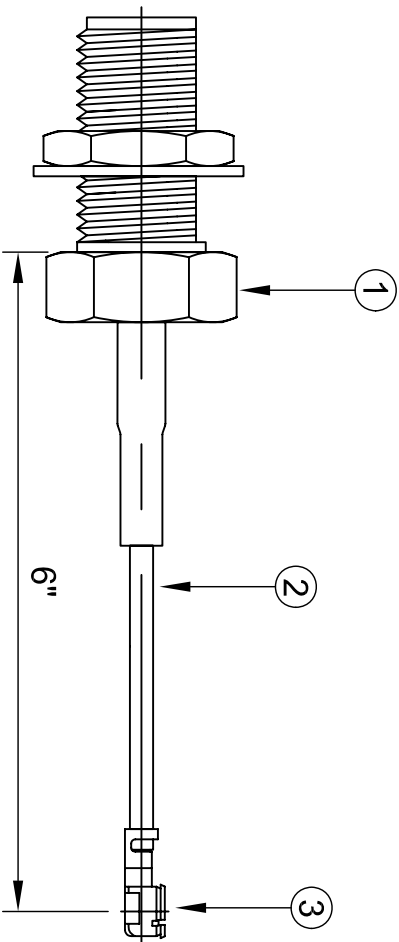

1. Connector : LTI-SASF13GT-178	Description		
2. Cable: Micro Coax 50ohm 1.32mm double shielded	Cable Assembly, SMA bulkhead crimp jack to IPX crimp jack,		
3. Connector : IPX	with 1.32mm double shielded micro coax 50ohm cable, 6 inches in length.		
4.	Scale	Drawing No.	File Name
5.	2:1		CB1.32D-IPX-SAF3GT-6in
6.	Description		
7.	Cable Assembly, SMA bulkhead crimp jack to IPX crimp jack,		
8.	with 1.32mm double shielded micro coax 50ohm cable, 6 inches in length.		

**LTI**  
**Lighthouse Technologies, Inc.**  
 9511 Ridgeway Ct, Suite B.  
 San Diego, CA 92123  
 Part Number:  
 CB1.32D-IPX-SAF3GT-6in