

| Revisions                 |         | Approved | Date |
|---------------------------|---------|----------|------|
| Description/Approver/Date | Checked | M.H.     | Date |
|                           | M.H.    | Drawn    | Date |
|                           | S.A.    |          |      |


  

| Tolerances     |
|----------------|
| 1-20=+/-0.2    |
| 20-30=+/-0.3   |
| 30-40=+/-0.4   |
| 40-50=+/-0.5   |
| 50-100=+/-0.75 |
| 100-300=+/-1.5 |
| Angles=+/-1    |

**Dimensions are in Millimeters**


  

| NOTES (plating thickness in micro-inches): | 5. Per MILL-P-19468   | 9. Nickel pl. 100 min. over copper strike                       |
|--|---|---|
| 1. Per QQ-B-626                            | 6. Per ZZ-R-765   | 10. Per QQ-P-35   |
| 2. Per QQ-S-764                            | 7. Per WW-T-799   | 11. Gold pl. 30 min. over nickel pl. 50 min. over copper strike |
| 3. Per QQ-C-530                            | 8. Gold pl. 5 min. over nickel pl. 50 min. over copper strike |   |
| 4. Per QQ-B-750                            |   |   |

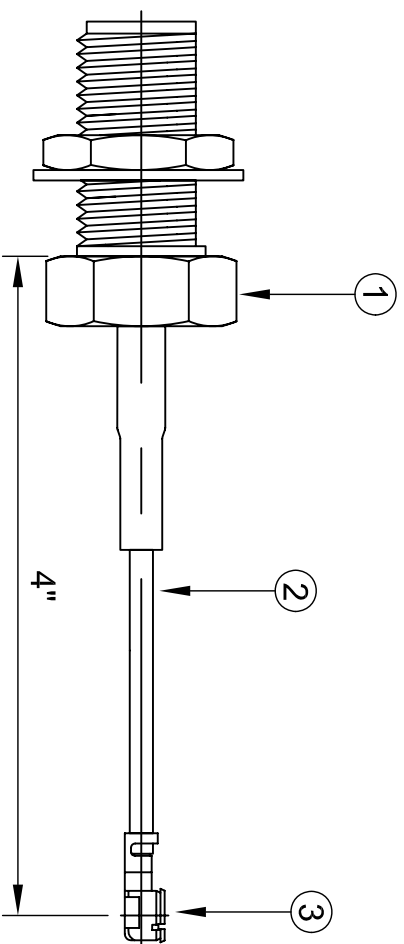

|                                   |  |                    |
|-----------------------------------|--|--------------------|
| 1. Connector : LTI-SASF13GT-178   | Description  |                    |
| 2. Cable: Micro Coax 50ohm RG-178 | Cable Assembly, SMA bulkhead crimp jack to IPX crimp jack, |                    |
| 3. Connector : IPX                | with RG-178 50ohm cable, 4 inches in length.               |                    |
| 4.                                | Scale  | 2:1                |
| 5.                                | Drawing No.  | CBG-IPX-SAF3GT-4in |
| 6.                                | File Name  | CBG-IPX-SAF3GT-4in |
| 7.                                |  |                    |
| 8.                                |  |                    |

|  |  |
|--|--|
|   |  |
| <b>Lighthouse Technologies, Inc.</b><br>9511 Ridgeway Ct, Suite B.<br>San Diego, CA 92123<br>Part Number:<br><b>CBG-IPX-SAF3GT-4in</b> |  |