



Revisions		Approved	Date
Description/Approver/Date	Checked	M.H.	Date
	Drawn	S.A.	Date
Tolerances 1-20=+/-0.2 20-30=+/-0.3 30-40=+/-0.4 40-50=+/-0.5 50-100=+/-0.75 100-300=+/-1.5 Angles=+/-1			
Dimensions are in Millimeters			
NOTES (plating thickness)			
1. Per QQ-B-626	6. Per MILL-P-19468	9. Nickel pl. 100 min. over copper strike	
2. Per QQ-S-764	7. Per ZZ-R-765	10. Per QQ-P-35	
3. Per QQ-C-530	8. Gold pl. 5 min. over nickel pl. 50 min. over copper strike	11. Gold pl. 30 min. over nickel pl. 50 min. over copper strike	
4. Per QQ-B-750			

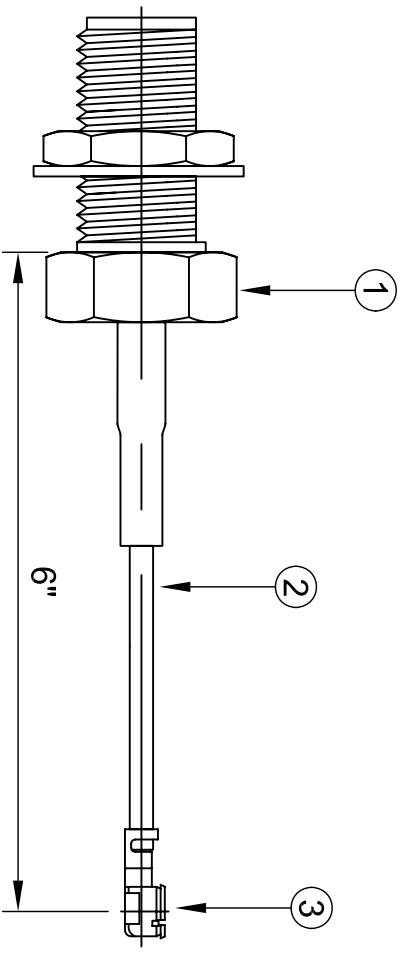

1.	Connector : LTI-SASF13GT-178
2.	Cable: Micro Coax 50ohm RG-178
3.	Connector : IPX
4.	
5.	
6.	
7.	
8.	

		
Lighthouse Technologies, Inc. 9511 Ridgeway Ct, Suite B. San Diego, CA 92123		
Part Number: CBG-IPX-SAF3GT-6in		
Description Cable Assembly, SMA bulkhead crimp jack to IPX crimp jack,		
with RG-178 50ohm cable, 6 inches in length.		
Scale	Drawing No.	File Name
2:1		CBG-IPX-SAF3GT-6in