

All components used in this connector
conform to RoHS standards.

**Tolerances**

1-20=+/-0.2
20-30=+/-0.3
30-40=+/-0.4
40-50=+/-0.5
50-100=+/-0.75
100-300=+/-1.5
Angles=+/-1

Dimensions are in Millimeters

Revisions
Description/Approved/Date

Approved
M.H.

Date
04/15/99

Checked
M.H.


Date
04/14/99

Drawn
K.R.E.

Date
04/12/99

NOTES (plating thickness in micro-inches):
1. Per QQ-B-626
2. Per QQ-S-764
3. Per QQ-C-530
4. Per QQ-B-750
5. Per MIL-P-19468
6. Per ZZ-R-765
7. Per WW-T-799
8. Gold pl. 5 min. over nickel pl. 50 min. over copper strike
9. Nickel pl. 100 min. over copper strike
10. Per QQ-P-35
11. Gold pl. 3 min. over nickel pl. 50 min. over copper strike

Approved by:
Date:

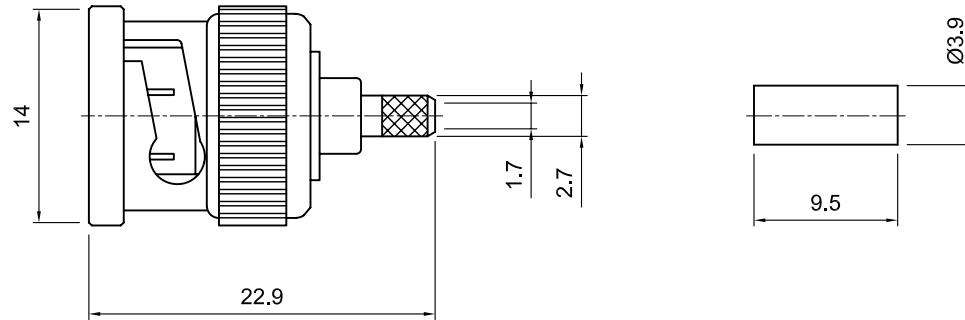

ITEM	MATERIAL	FINISH	 Lighthouse Technologies, Inc. 9511 Ridghaven Court, Suite B San Diego, CA 92123 Part Number: LTI-7BSM11NT-179		
Connector Body	Brass, Note 1	Nickel, Note 9			
Center Contact: Female	Brass, Note 1	Gold, Note 11			
Insulation	Teflon, Note 5	None			
Ferrule	Annealed Copper, Note 7	Same as body			
Gasket	--	--			
Hex Nut	--	--			
Lock Washer	--	--			
			Description 75 ohm BNC crimp plug for RG-179. Nickel plated brass body, teflon dielectric.		
			Scale 2:1	Drawing No. BNC/7BSM11-179	File Name 7BSM11-179