



Tolerances

1-20=+/-0.2
20-30=+/-0.3
30-40=+/-0.4
40-50=+/-0.5
50-100=+/-0.75
100-300=+/-1.5
Angles=+/-1

Dimensions are in MillimetersRevisions
Description/Approved/DateApproved
M.H.Date
07/21/99Checked
M.H.Date
07/18/99Drawn
K.R.E.Date
07/17/99

NOTES (plating thickness in micro-inches):

1. Per QQ-B-626	5. Per MIL-P-19468	9. Nickel pl. 100 min. over copper strike
2. Per QQ-S-764	6. Per ZZ-R-765	10. Per QQ-P-35
3. Per QQ-C-530	7. Per WW-T-799	11. Gold pl. 3 min. over nickel pl. 50 min. over copper strike
4. Per QQ-B-750	8. Gold pl. 5 min. over nickel pl. 50 min. over copper strike	

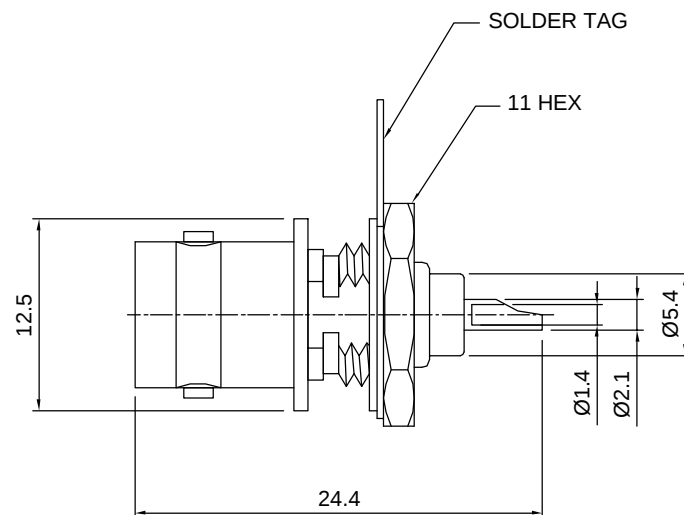

ITEM	MATERIAL	FINISH	 Lighthouse Technologies, Inc. 4907 Morena Boulevard, #1411 San Diego, California 92117 Part Number: LTI-BSF43NT		
Connector Body	Brass, Note 1	Nickel, Note 9			
Center Contact: Female	Phosphor Bronze, Note 4	Gold, Note 11	Description BNC front mount bulkhead jack with solder cup termination.		
Insulation	Teflon, Note 5	None			
Ferrule	--	--	Nickel plated brass body, teflon dielectric.		
Gasket	--	--			
Hex Nut	Brass, Note 1	Same as body	Scale 2:1	Drawing No. BNC/BSF43	File Name BSF43
Lock Washer	Brass, Note 1	Same as body			