

All components used in this connector conform to RoHS standards.

**Tolerances**


1-20=+/-0.2
 20-30=+/-0.3
 30-40=+/-0.4
 40-50=+/-0.5
 50-100=+/-0.75
 100-300=+/-1.5
 Angles=+/-1

Dimensions are in Millimeters

Revisions	Approved	Date
Description/Approved/Date	M.H.	1/16/00
	Checked M.H.	Date 1/16/00
	Drawn K.R.E.	Date 1/16/00
NOTES (plating thickness in micro-inches): 1. Per QQ-B-626 2. Per QQ-S-764 3. Per QQ-C-530 4. Per QQ-B-750		
5. Per MIL-P-19468 6. Per ZZ-R-765 7. Per WW-T-799 8. Gold pl. 5 min. over nickel pl. 50 min. over copper strike		
9. Nickel pl. 100 min. over copper strike 10. Per QQ-P-35 11. Gold pl. 30 min. over nickel pl. 50 min. over copper strike		

Approved by:

Date:

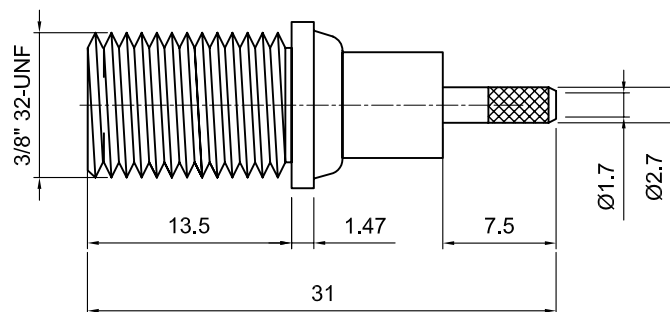

ITEM	MATERIAL	FINISH	 Lighthouse Technologies, Inc. 5640 Kearny Mesa Road, Suite N San Diego, California 92111 Part Number: LTI-FSF11NP-179		
Connector Body	Brass, Note 1	Nickel, Note 9			
Center Contact: Female	Phosphor Bronze	Tin			
Insulation	Polypropylene	None			
Ferrule	Annealed Copper, Note 7	Same as body			
Gasket	--	--			
Hex Nut	--	--			
Lock Washer	--	--			
			Description	F srmp jack for RG 179. Nickel plated Brass body, PP dielectric.	
			Scale 1:1	Drawing No. FSF11-179	File Name FSF11-179