



Tolerances		Revisions	
1-20=+/-0.2	20-30=+/-0.3	30-40=+/-0.4	40-50=+/-0.5
50-100=+/-0.75	100-300=+/-1.5	Angles=+/-1	
Dimensions are in Millimeters			
Description/Approved/Date		Approved	
		M.H.	6/20/99
		Checked	Date
		M.H.	6/20/99
		Drawn	Date
		K.R.E.	6/20/99
NOTES (plating thickness in micro-inches):			
1. Per QQ-B-626	6. Per ZZ-R-765	9. Nickel pl. 100 min. over	copper strike
2. Per QQ-S-764	7. Per WW-1-799	10. Per QQ-P-35	
3. Per QQ-C-530	8. Gold pl. 5 min. over	11. Gold pl. 5 min. over	
4. Per QQ-B-750	nickel pl. 50 min. over	nickel pl. 50 min. over	
	copper strike	copper strike	



ITEM	MATERIAL	FINISH
Connector Body	Brass, Note 1	Nickel, Note 9
Center Contact: Female	Brass, Note 1	Nickel, Note 9
Insulation	Polypropylene	None
Ferrule	Annealed Copper, Note 7	Same as body
Gasket	--	--
Hex Nut	Brass, Note 1	Same as body
Lock Washer	Brass, Note 1	Same as body

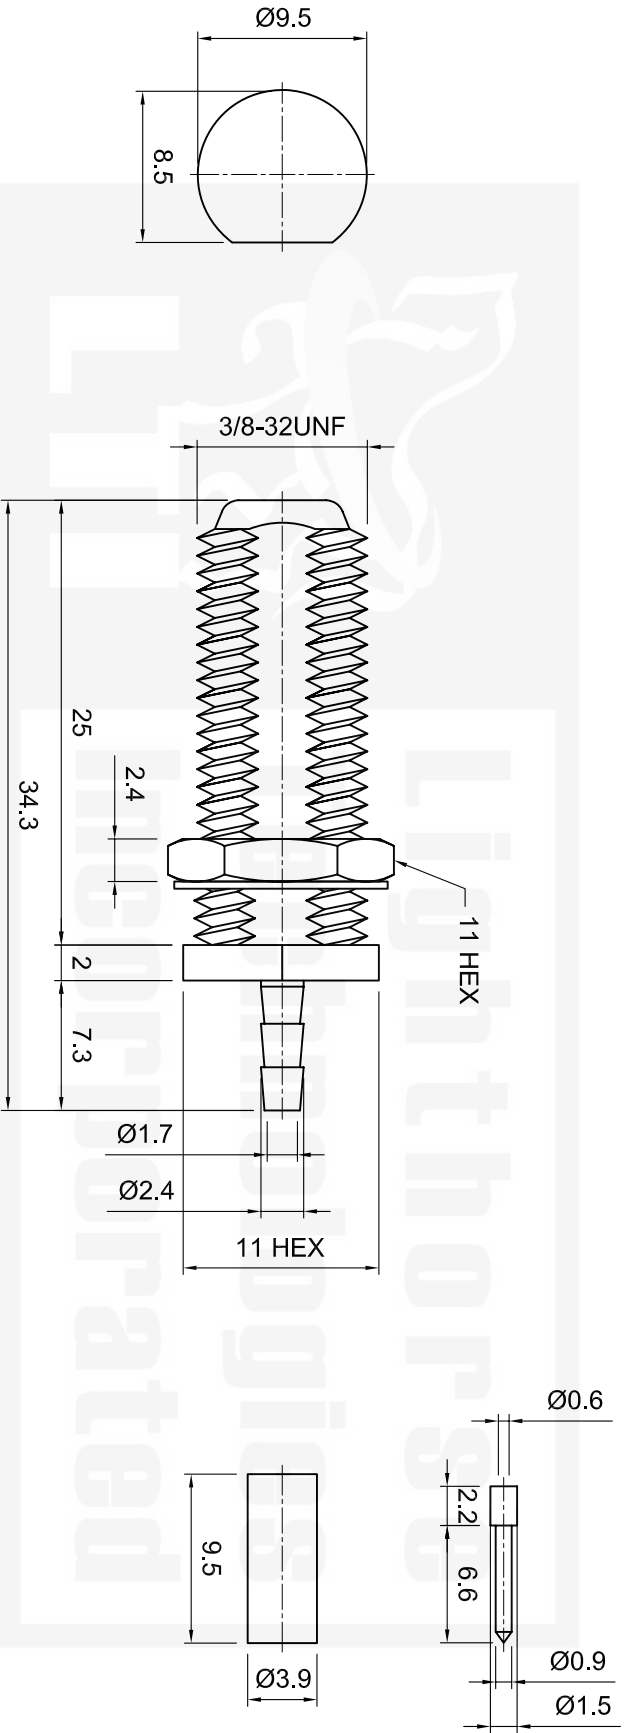

**Lighthouse Technologies, Inc.**  
5640 Kearny Mesa Rd. Ste. N  
San Diego, California 92111  
Part Number:  
**LTI-FSF13RNP-179**

Description  
F series Bulkhead Jack for RG-179

Scale  
1:1

Drawing No.  
FSF13RNP-179

File Name  
FSF13RNP-179