





Tolerances

- 1-20=+/-0.2
- 20-30=+/-0.3
- 30-40=+/-0.4
- 40-50=+/-0.5
- 50-100=+/-0.75
- 100-300=+/-1.5
- Angles=+/-1

Dimensions are in Millimeters

Revisions	Approved	Date
Description/Approved/Date	M.H.	06/12/00
	Checked	Date
	M.H.	06/12/00
	Drawn	Date
	K.R.E.	06/17/00

NOTES (pabling thickness in micro-inches):	5. Per MIL-P-19468	9. Nickel pl. 100 min. over copper siffne
1. Per QQ-B-626	6. Per ZZ-R-765	10. Per QQ-P-35
2. Per QQ-S-764	7. Per WW-1-799	11. Gold pl. 30 min. over nickel pl. 50 min. over copper siffne
3. Per QQ-C-530	8. Gold pl. 50 min. over nickel siffne	
4. Per QQ-B-750	copper siffne	

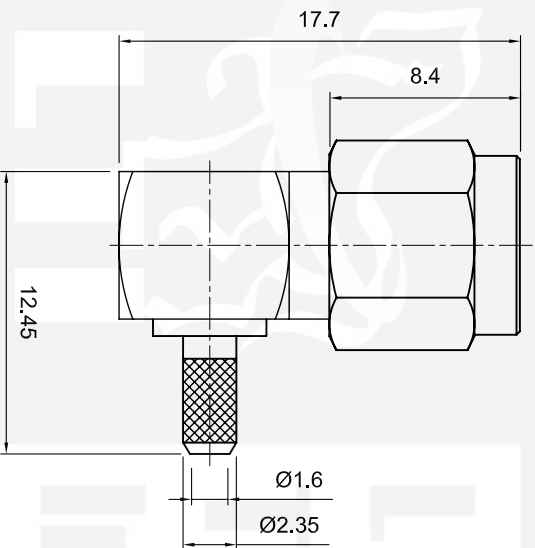

ITEM	MATERIAL	FINISH
Connector Body	Brass, Note 1	Gold, Note 8
Center Contact: Male	Brass, Note 1	Gold, Note 11
Insulation	Teflon, Note 5	None
Ferrule	Annealed Copper, Note 7	Same as body
Gasket	--	--
Hex Nut	--	--
Lock Washer	--	--



Lighthorse Technologies, Inc.
5640 Kearny Mesa Road, Suite N
San Diego, California 92111
Part Number:
L7T-SALM11GT-316

Description SMA right angle crimp plug for RG-316. Gold plated brass		
body, teflon dielectric.		
Scale 2:1	Drawing No.	File Name SALM11-316