


Tolerances
 1-20=+/-0.2
 20-30=+/-0.3
 30-40=+/-0.4
 40-50=+/-0.5
 50-100=+/-0.75
 100-300=+/-1.5
 Angles=+/-1



Dimensions are in Millimeters

Revisions		Approved	Date
Description/Approved/Date	M.H.	10/13/00	10/13/00
	Checked M.H.		10/13/00
	Drawn K.R.E.		10/12/00

NOTES (plating thickness in microinches):
 1. Per QQ-B-626
 2. Per QQ-S-764
 3. Per QQ-C-530
 4. Per QQ-B-750
 5. Per MIL-P-19468
 6. Per ZZ-R-765
 7. Per WW-1-799
 8. Gold pl. 5 min. over nickel pl. 50 min. over copper strike
 9. Nickel pl. 100 min. over copper strike
 10. Per QQ-P-35
 11. Gold pl. 30 min. over nickel pl. 50 min. over copper strike

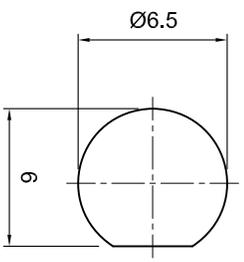

MOUNTING HOLE CUTOUT

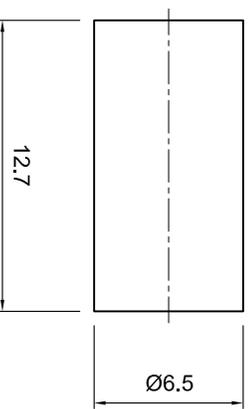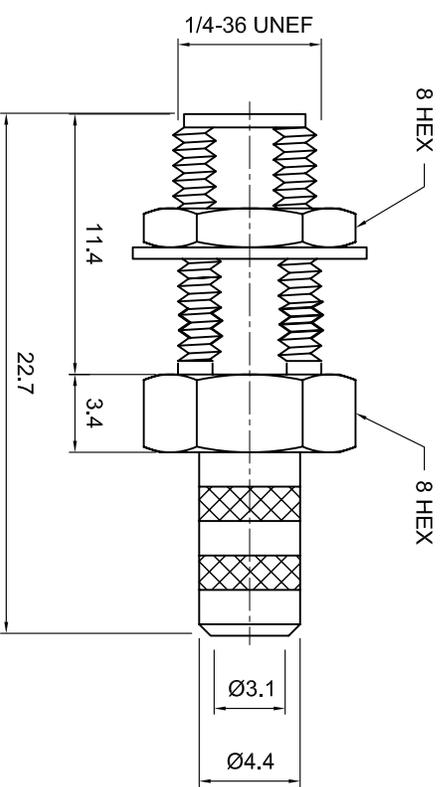

ITEM	MATERIAL	FINISH
Connector Body	Brass, Note 1	Gold, Note 8
Center Contact: Male	Brass, Note 1	Gold, Note 11
Insulation	Teflon, Note 5	None
Ferrule	Annealed Copper, Note 7	Same as body
Gasket	--	--
Hex Nut	Brass, Note 1	Same as body
Lock Washer	Brass, Note 1	Same as body

Lighthouse Technologies, Inc.
 5640 Keamy Mesa Road, Suite N
 San Diego, California 92111
 Part Number:
LTJ-SASRF13GT-58

Description SMA Reverse Polarity bulkhead crimp jack for RG-58, Gold plated		
brass body, teflon dielectric.		
Scale 3:1	Drawing No. SMA/SASRF13GT-58	File Name SASRF13GT-58