

All components used in this connector conform to RoHS standards.





**Tolerances**  
 1-20=+/-0.2  
 20-30=+/-0.3  
 30-40=+/-0.4  
 40-50=+/-0.5  
 50-100=+/-0.75  
 100-300=+/-1.5  
 Angles=+/-1  
**Dimensions are in Millimeters**

Revisions	Approved	Date
Description/Approved/Date	M.H.	03/07/99
	Checked	Date
	M.H.	03/07/99
	Drawn	Date
	K.R.E.	03/07/99

NOTES (plating thickness in micro-inches):  
 5. Per MIL-P-19468  
 6. Per ZZ-R-765  
 7. Per WW-T-799  
 8. Gold pl. 5 min. over nickel pl. 50 min. over copper strike  
 9. Nickel pl. 100 min. over copper strike  
 10. Per QQ-P-35  
 11. Gold pl. 30 min. over nickel pl. 50 min. over copper strike

**Approved by:**  
**Date:**

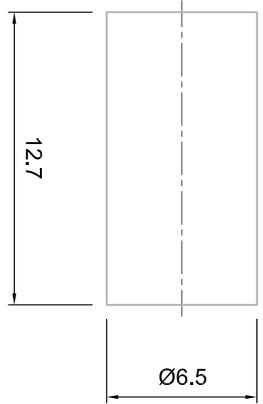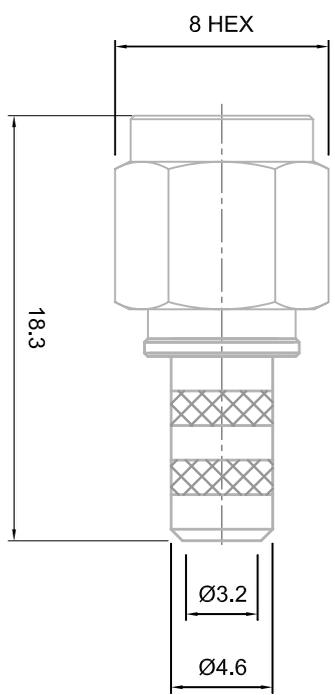

ITEM	MATERIAL	FINISH
Connector Body	Brass, Note 1	Gold, Note 8
Center Contact: Female	BeCu, Note 3	Gold, Note 11
Insulation	Teflon, Note 5	None
Ferrule	Annealed Copper, Note 7	Same as body
Gasket	--	--
Hex Nut	--	--
Lock Washer	--	--

**Lighthouse Technologies, Inc.**  
 9511 Ridgeway Court, Suite B  
 San Diego, CA 92123  
 Part Number:  
**LT-SASRM11GT-58**

Description  
 SMA reverse polarity crimp plug for RG-58 cable. Gold plated

Brass body, Teflon dielectric.  
 Scale 3:1

Drawing No. File Name  
 SASRM11-58