
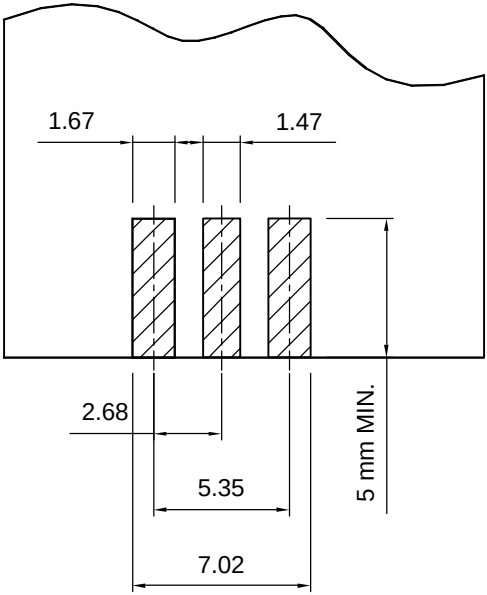
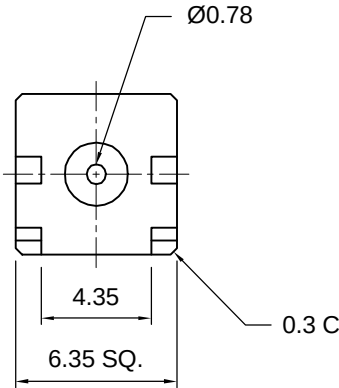
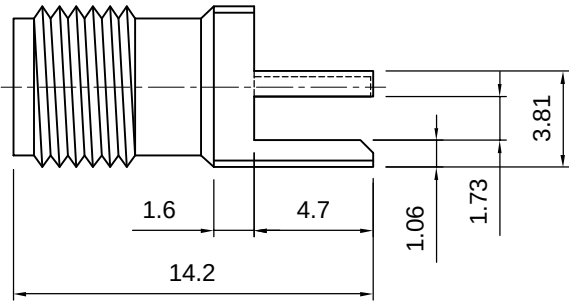


	Tolerances 1-20=+/-0.2 20-30=+/-0.3 30-40=+/-0.4 40-50=+/-0.5 50-100=+/-0.75 100-300=+/-1.5 Angles=+/-1 Dimensions are in Millimeters	Revisions	Approved	Date
		Description/Approved/Date	M.H.	03/10/99
			Checked	Date
			M.H.	03/10/99
			Drawn	Date
			K.R.E.	03/10/99
		NOTES (plating thickness in micro-inches): 1. Per QQ-B-626 2. Per QQ-S-764 3. Per QQ-C-530 4. Per QQ-B-750		

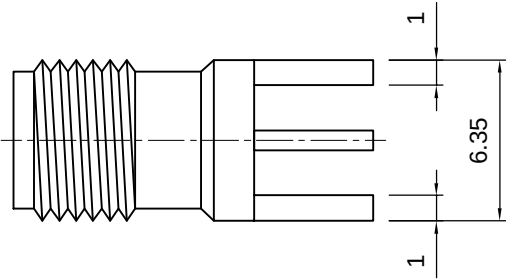

LANDING PAD DIMENSIONS

ITEM	MATERIAL	FINISH	 Lighthouse Technologies, Inc. 4907 Morena Boulevard, #1411 San Diego, California 92117 Part Number: LTI-SASF55ZNT		
Connector Body	Brass, Note 1	Nickel, Note 9			
Center Contact: Female	Beryllium Copper, Note 3	Gold, Note 11			
Insulation	Teflon, Note 5	None			
Ferrule	--	--	Description		
Gasket	--	--	SMA end launch PCB jack for .062" PCB. Nickel plated		
Hex Nut	--	--	brass body, teflon dielectric.		
Lock Washer	--	--	Scale	Drawing No.	File Name
			3:1	SMA/SASF55Z	SASF55ZNT