


Tolerances		Revisions																
1-20=+/-0.2	20-30=+/-0.3	30-40=+/-0.4	40-50=+/-0.5															
50-100=+/-0.75	100-300=+/-1.5	Angles=+/-1																
Dimensions are in Millimeters		<table border="1"> <thead> <tr> <th>Description/Approved/Date</th> <th>Approved</th> <th>Date</th> </tr> </thead> <tbody> <tr> <td></td> <td>M.H.</td> <td>Date</td> </tr> <tr> <td></td> <td>M.H.</td> <td>Date</td> </tr> <tr> <td></td> <td>Drawn</td> <td>Date</td> </tr> <tr> <td></td> <td>S.A.</td> <td></td> </tr> </tbody> </table>		Description/Approved/Date	Approved	Date		M.H.	Date		M.H.	Date		Drawn	Date		S.A.	
Description/Approved/Date	Approved	Date																
	M.H.	Date																
	M.H.	Date																
	Drawn	Date																
	S.A.																	
NOTES (plating thickness) <table border="0"> <tr> <td>1. Per QQ-B-626</td> <td>6. Per MILL-P-19468</td> <td>9. Nickel pl. 100 min. over copper strike</td> </tr> <tr> <td>2. Per QQ-S-764</td> <td>7. Per ZZ-R-765</td> <td>10. Per QQ-P-35</td> </tr> <tr> <td>3. Per QQ-C-530</td> <td>8. Gold pl. 5 min. over nickel pl. 50 min. over copper strike</td> <td>11. Gold pl. 30 min. over nickel pl. 50 min. over copper strike</td> </tr> <tr> <td>4. Per QQ-B-750</td> <td></td> <td></td> </tr> </table>				1. Per QQ-B-626	6. Per MILL-P-19468	9. Nickel pl. 100 min. over copper strike	2. Per QQ-S-764	7. Per ZZ-R-765	10. Per QQ-P-35	3. Per QQ-C-530	8. Gold pl. 5 min. over nickel pl. 50 min. over copper strike	11. Gold pl. 30 min. over nickel pl. 50 min. over copper strike	4. Per QQ-B-750					
1. Per QQ-B-626	6. Per MILL-P-19468	9. Nickel pl. 100 min. over copper strike																
2. Per QQ-S-764	7. Per ZZ-R-765	10. Per QQ-P-35																
3. Per QQ-C-530	8. Gold pl. 5 min. over nickel pl. 50 min. over copper strike	11. Gold pl. 30 min. over nickel pl. 50 min. over copper strike																
4. Per QQ-B-750																		



1. Connector : LTI-SASRF13GT-178	Description	
2. Cable: Micro Coax 50ohm 1.13mm micro coax	Cable Assembly, RP-SMA bulkhead crimp jack to IPX crimp jack,	
3. Connector : IPX	with 1.13mm double shielded 50ohm cable, 8 inches in length.	
4.	Scale	2:1
5.	Drawing No.	CB1.13-IPX-SARF3GT-8in
6.	File Name	CB1.13-IPX-SARF3GT-8in
7.		
8.		

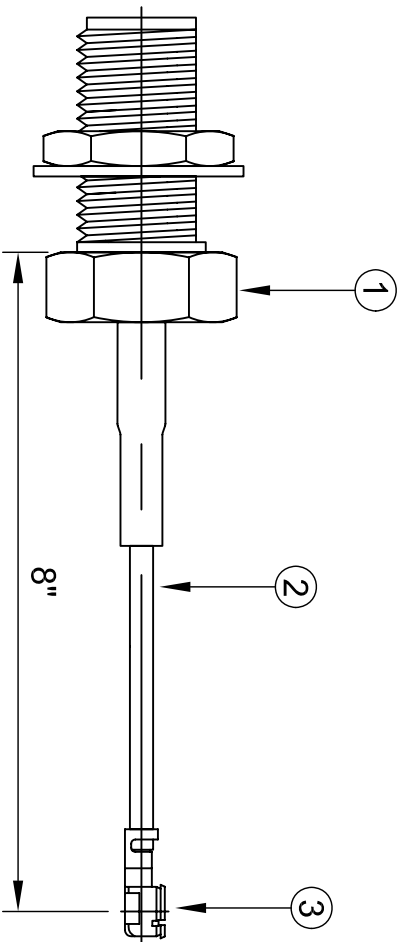

Lighthouse Technologies, Inc.

9511 Ridgeway Ct, Suite B,
San Diego, CA 92123

Part Number:
CB1.13-IPX-SARF3GT-8in